



SBS-603040


750mAh

The SBS 603040-750 is a 3.7V, 750mAh Li-Polymer rechargeable battery pack in a 1S1P configuration. It features a built-in protection circuit that safeguards the battery against deep-discharging, over-charging, and short circuits

Electrical Characteristics:

Rated Capacity	750mAh
Nominal Voltage	3.7 V
Max Continuos Charge Current	1A
Max Continuos Discharge Current	1A
Over-charge Protection Voltage	4.28 V
Over-discharge Protection Voltage	3V
Over-current Protection for Discharge	-
Short Circuit Protection	YES
Discharge Temperature	-10 ~ 60°C
Charge Temperature	0-20°C(0.2C)/20 to 45°C(0.5C)
Typical weight	18gm
Connector	JST PHR-2

Drawing of battery pack:

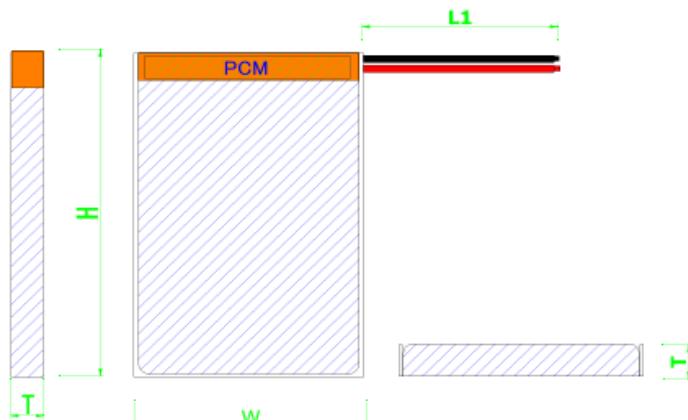

Dimensions of battery pack:

Symbol	Size in mm	
	Thickness	Width
T	6.2mm	
W		30.5mm
H		42.5mm
A		50± 5 mm

Typical Applications:

- Telematics
- Medical Devices
- Robots
- Wearable Devices
- IOT Devices